

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 1 148 702 A2

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:

24.10.2001 Bulletin 2001/43

(51) Int Cl.7: **H04N 1/21, H04N 1/00**

(21) Application number: **01109534.6**

(22) Date of filing: **17.04.2001**

(84) Designated Contracting States:

**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR**

Designated Extension States:

AL LT LV MK RO SI

(30) Priority: **17.04.2000 JP 2000114863**

(71) Applicant: **MATSUSHITA ELECTRIC INDUSTRIAL
CO., LTD.**

Kadoma-shi, Osaka 571-8501 (JP)

(72) Inventors:

• **Matsuura, Satoshi**

Kyotanabe-shi, Kyoto 610-0300 (JP)

• **Kutsumi, Hiroshi**

Moriguchi-shi, Osaka 570-0042 (JP)

• **Ozawa, Jun**

Nara-shi, Nara 631-0005 (JP)

• **Noguchi, Eiji**

Sakai-shi, Osaka 591-8021 (JP)

• **Maruno, Susumu**

Kyotanabe-shi, Kyoto 610-0354 (JP)


(74) Representative: **Grünecker, Kinkeldey,
Stockmair & Schwanhäusser Anwaltssozietät
Maximilianstrasse 58
80538 München (DE)**

(54) Digital photograph system

(57) A digital camera used for taking photographs is connected to a terminal to print one or more selected among the photographs on the spot. An advertisement supplied from an advertising server is added to the bottom of the printed photograph, to reduce the proportion

of cost borne by the user with the advertisement charge. After the photograph is printed, the digital camera is collected by the terminal for recycling. The photograph can also be temporarily uploaded to the Web, so that the user can download the photograph to the user's personal computer afterwards.

FIG. 1

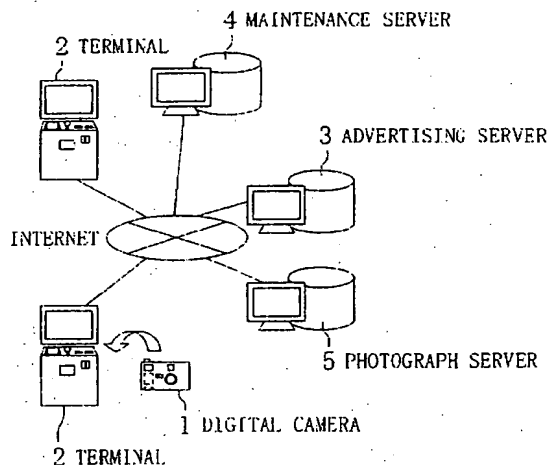

EP 1 148 702 A2

Description

BRIEF DESCRIPTION OF THE DRAWINGS

BACKGROUND OF THE INVENTION

[0001] The present invention relates to a digital photograph system using a camera for taking digital photographs.

[0002] There are conventionally known lens-equipped films (recycling cameras) available at low prices because the bodies thereof are recycled. Such recycling cameras have not only an advantage of improving the convenience for users, but also an advantage of providing a possibility of profiting from added values for film manufacturers.

[0003] The conventional recycling cameras however have the following disadvantages. Since the recycling cameras employ a silver halide photographic method, it is not possible to select a photograph to be developed during development. In addition, a plurality of cameras are required if many photographs are to be taken. In reverse, if only a few photographs are taken, the remaining part of the film is wasted, or developing of the photographs is postponed until the entire film is used.

[0004] Digital cameras, which do not involve use of a film, have an advantage that selection of a photograph and determination of the number of photographs taken can be done comparatively freely. Digital cameras however have a disadvantage that the unit price per photograph is high compared with cameras employing the silver halide photographic method.

SUMMARY OF THE INVENTION

[0005] The object of the present invention is providing a digital photograph system capable of reducing the print unit price.

[0006] In order to attain the above object, the digital photograph system of the present invention includes: a camera having a function of storing data of a digital photograph taken; and a terminal for reading the photograph data stored in the camera, outputting the photograph data, and thereafter collecting the camera for recycling. This construction achieves recycling of the camera, and thus the print unit price can be reduced.

[0007] Alternatively, the digital photograph system of the present invention includes: a camera having a function of storing data of a digital photograph taken; a terminal for reading the photograph data stored in the camera and outputting the photograph data; and an advertising server connected to the terminal via a network, wherein the advertising server provides advertisement data to be added to the photograph data output from the terminal. By adding an advertisement to the photograph, the print unit price can be reduced.

[0008]

FIG. 1 is a block diagram illustrating the overall construction of an embodiment of the digital photograph system of the present invention.

FIG. 2 is a conceptual view for description of recycling of a digital camera in the digital photograph system of FIG. 1.

FIG. 3 is a conceptual view for description of a function of an advertising server in the digital photograph system of FIG. 1.

FIG. 4 is a conceptual view for description of an alternative function of the advertising server in the digital photograph system of FIG. 1.

FIG. 5 is an external view of the digital camera in the system of FIG. 1.

FIG. 6 is a block diagram of a schematic construction of the digital camera in the system of FIG. 1.

FIG. 7 is a block diagram of a detailed construction of the digital camera in the system of FIG. 1.

FIG. 8 is a flowchart of the photographing operation of the digital camera in the system of FIG. 1.

FIG. 9 is a flowchart of the image output operation of the digital camera in the system of FIG. 1.

FIG. 10 is an external view of a terminal in the system of FIG. 1.

FIG. 11 is a block diagram of a schematic construction of the terminal in the system of FIG. 1.

FIG. 12 is a block diagram of a detailed construction of the terminal in the system of FIG. 1.

FIG. 13 is a flowchart of the operation of reading data from the digital camera performed by the terminal in the system of FIG. 1.

FIG. 14 is a flowchart of the operation of printing a photograph performed by the terminal in the system of FIG. 1.

FIG. 15 is an exemplary illustration of a graphical user interface (GUI) for selecting whether or not an advertisement should be added displayed on the terminal in the system of FIG. 1.

FIG. 16 is an exemplary illustration of a GUI for selection of a photograph to be printed displayed on the terminal in the system of FIG. 1.

FIG. 17 is an exemplary illustration of an advertisement-added photograph printed by the terminal in the system of FIG. 1.

FIG. 18 is an exemplary illustration of an entry form for a prize contest in the system of FIG. 1.

FIG. 19 is a block diagram of a detailed construction of the advertising server in the system in FIG. 1.

FIG. 20 is a flowchart of the advertisement distribution operation of the advertising server in the system of FIG. 1.

FIG. 21 is an exemplary illustration of a GUI for selection of the photograph output destination displayed on the terminal in the system of FIG. 1.

FIG. 22 is an exemplary illustration of a GUI for entry of an e-mail address displayed on the terminal in the system of FIG. 1.

FIG. 23 is an exemplary illustration of photograph data to be transmitted by e-mail in the system of FIG. 1.

FIG. 24 is an exemplary illustration of a GUI for entry of a password displayed on the terminal in the system of FIG. 1.

FIG. 25 is an exemplary illustration of a Web registration information card output from the terminal in the system of FIG. 1.

FIG. 26 is an exemplary illustration of a log-in screen of a photograph server on the Web in the system of FIG. 1.

FIG. 27 is an exemplary illustration of a Web page design for browsing photographs in the system of FIG. 1.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0009] Hereinafter, an embodiment of the present invention will be described with reference to the accompanying drawings.

[0010] FIG. 1 illustrates the overall construction of an embodiment of the digital photograph system of the present invention. Referring to FIG. 1, the digital photograph system of this embodiment includes: a digital camera 1 for taking digital photographs; a terminal 2 for reading data in the digital camera 1 and printing the data; an advertising server 3 for managing advertisements to be added to photographs; a maintenance server 4 for scheduling actions to be taken in response to notifications from the terminals 2 of being out of paper, out of ink, out of order, and the like; and a photograph server 5 for temporarily storing photographs on the Web. The components 2 to 5 are connected to the Internet via dial-up connection and IP connection. The connection to the Internet may be established by other schemes, such as packet communications using Personal Handy Phone Systems (PHS) or cellular phones. The servers 3 to 5 may be implemented by one personal computer or one work station. Any of these servers may be omitted depending on the services to be provided. For example, the photograph server 5 may be omitted if the service of holding photograph data on the Web is not provided.

[0011] Using the system of FIG. 1, the following can be realized, for example. A user purchases a digital camera 1 in a pleasure resort such as an amusement park. After taking photographs with the digital camera 1, the user connects the digital camera 2 to the terminal 2 placed somewhere in the park and prints a photograph the user likes among others on the spot. Since the body of a digital camera costs comparatively high, the price of the digital camera should desirably include an insurance against possible failure in recovery of the body due to loss or theft. An advertisement may be printed on the

bottom portion of the photograph so that the proportion of the cost borne by the user can be reduced with the advertisement charge. This advertising is also advantageous for an advertiser because it is rational to pay an amount corresponding to the number of photographs actually printed. Furthermore, the user can temporarily upload the photograph taken to the Web, to download the photograph image to the user's personal computer afterwards. This is very convenient when the user desires to reuse the photograph for making a greeting card and the like. In a facility having gates at the entrance and the exit, such as an amusement park, it is also possible to lend digital cameras to visitors who want them free of charge at the entrance, and get them back at the exit.

[0012] In the system of FIG. 1, digital cameras can be recycled as illustrated in FIG. 2. In FIG. 2, note that the open terminal in the street may be placed inside the store.

[0013] The advertising may be implemented in the procedures (1) through (6) shown in FIG. 3, including the issuance of a billing statement to the advertiser by the advertising server. Advertising conditions, such as the area in which an advertisement should be spread and the upper limit of the number of times of printing of the advertisement, may be set at the entry of advertisement data.

[0014] Alternatively, the advertising server may act in the procedures (1) to (6) shown in FIG. 4. In this case, assume that the advertiser signs a contract with the advertising server in advance, together with notification of the bank account of the advertiser for automatic transfer of the charge.

[0015] Hereinafter, the respective components constituting the system of FIG. 1 will be described.

[0016] FIG. 5 is an external view of the digital camera 1 in the system of FIG. 1, and FIG. 6 illustrates a schematic construction of the digital camera 1, which is basically the same as that of a standard digital camera. Referring to FIG. 5, the digital camera 1 includes a shutter 101, a flash 102, a finder 103, a lens 104, a battery 105, a battery charging terminal 106, an output terminal 107 for outputting data in a FROM 113, a flash switch 108 for switching ON/OFF of the flash 102, and a count display 109 for displaying the number of remaining photographs allowed to be taken. Referring to FIG. 6, the digital camera 1 further includes a CPU 110 for executing a program, a ROM 111 for storing the program, a RAM 112 for reading the contents in the ROM 111 as required, the FROM 113 for storing data, a CCD 114 for converting light obtained through the lens 104 into image information, and a capture section 115 for capturing digital still-picture data from dynamically changing digital information in the CCD 114. The FROM 113 may be omitted if the contents in the RAM 112 can be backed up by use of the battery 105. In this relation, another button battery may be provided for the backing-up. As the count display 109, any display devices including a

liquid crystal display device may be used.

[0017] FIG. 7 illustrates a detailed construction of the digital camera 1 in the system of FIG. 1. Referring to FIG. 7, an image storage section 202 stores a photograph image taken, an output destination verification section 203 verifies whether or not the terminal 2 is an authorized terminal when the digital camera 1 is connected to the terminal 2, and an image output section 107 outputs the photograph image in the image storage section 202 via the output terminal 107.

[0018] FIG. 8 shows the photographing operation of the digital camera 1 in the system of FIG. 1. First, in step a1, the capacity of the image storage section 202 is examined to determine whether or not the number of remaining photographs allowed to be taken is zero. If it is zero, the process proceeds to step a2, where the fact that all the photographs allowed have been taken is displayed on the count display 109, and the process is terminated. In step a3, whether or not the shutter 101 has been pressed is detected. If the shutter 101 has been pressed, the process proceeds to step a4, where whether or not the flash switch 108 is ON is examined. If it is ON, the process proceeds to step a5. Otherwise, the process proceeds to step a6. In step a5, the flash 102 is lit. In step a6, the image data obtained through the CCD 114 is captured by the capture section 115. In step a7, the image data captured in step a6 is stored in the image storage section 202. In step a8, the number of remaining photographs allowed to be taken of the counter is decremented by one. In step a9, the counter value obtained in step a8 is displayed on the count display 109. The process then returns to the start.

[0019] FIG. 9 shows the image output operation of the digital camera 1 in the system of FIG. 1. First, in step b1, connection of the digital camera 1 to the terminal 2 is determined by examining whether or not a voltage is detected at the output terminal 107. If a voltage is detected, the process proceeds to step b2, where whether or not the terminal is an authorized terminal is verified by the output destination verification section 203. This verification of the terminal is performed for the purpose of keeping the recovery rate of the digital cameras from decreasing by blocking retrieval of data in the digital camera for recycling by an unauthorized apparatus. This function can also be used for the purpose of ensuring optimum printing by the terminal that can identify the specifications of the digital camera such as the type and resolution thereof. In step b3, whether or not the verification in step b2 has succeeded is determined. If succeeded, the process proceeds to step b5. Otherwise, the process proceeds to step b4, where occurrence of the error is displayed on the count display 109, and the process is terminated. In step b5, all the image data taken are transferred to the terminal 2 from the image output section 204. In step b6, whether or not the data output has succeeded is examined. If succeeded, the process proceeds to step b7. Otherwise, the process proceeds to step b4. In step b7, the fact that the data output

has succeeded is displayed on the count display 109, and the process is terminated.

[0020] In the illustrated example, the digital camera 1 includes the FROM 113 for storing images and the output destination verification section 203 for blocking retrieval of data by an unauthorized terminal. Alternatively, a semiconductor memory provided with the verification function, such as a SD memory card, may be used in place of the FROM 113 and the output destination verification section 203.

[0021] FIG. 10 is an external view of the terminal 2 in the system of FIG. 1, and FIG. 11 illustrates a schematic construction of the terminal 2. Referring to FIG. 10, the terminal 2 includes: a display 301 for displaying a graphical user interface (GUI); a camera receiving recess 302 in which the digital camera 1 is placed; an input terminal 303 to which the digital camera 1 is connected; a coin insertion slot 304 through which the charge is paid; a operation panel 305 for manipulating the GUI; and a photograph outlet 306 to which a printed photograph is ejected. Referring to FIG. 11, the terminal 2 further includes: a HDD 307 for storing a program and data; a printer 308 for printing a digital image on a sheet; and a modem 309 for accessing the Internet. The illustrated system is constructed to use the modem under the dial-up connection. The terminal unit may otherwise be constructed to use other communication infrastructures such as ISDN and FTTH. The operation panel may be integrated with the display by using a touch-panel display.

[0022] FIG. 12 illustrates a detailed construction of the terminal 2 in the system of FIG. 1. Referring to FIG. 12, a camera verification section 401 verifies that the digital camera connected to the input terminal 303 is of a compatible type. An image read section 402 reads image data from the connected digital camera 1. A temporary image storage section 403 temporarily stores the image data read by the image read section 402. A GUI generation section 404 changes the GUI display in response to the input through the operation panel 305 and the like. A communication control section 405 establishes communications with the advertising server 3 and the like by use of the modem 309.

[0023] FIG. 13 shows the operation of reading data from the digital camera 1 performed by the terminal 2 in the system of FIG. 1. First, in step c1, whether or not the digital camera 1 has been connected to the input terminal 303 is examined. If connected, the process proceeds to step c2, where whether or not the connected digital camera 1 detected in step c1 is of a compatible type is verified. In step c3, whether or not the verification in step c2 has succeeded is examined. If succeeded, the process proceeds to step c5. Otherwise, the process proceeds to step c4, where occurrence of the error is displayed on the display 301, and the process is terminated. In step c5, all the image data are read from the digital camera 1. During the read operation, the camera body may be locked to the terminal so that the digital

camera 1 is prevented from disjoining from the input terminal 303. In step c6, whether or not the data read has succeeded is determined. If succeeded, the process proceeds to step c7. Otherwise, the process proceeds to step c4. In step c7, a lid provided to cover the camera receiving recess 302 is closed, for recovery of the digital camera 1. Step c7 is skipped if it has been found that this digital camera is not recyclable during the verification in step c2. In step c8, GUIs guiding the procedure for printing the read photograph are displayed, and the process is terminated.

[0024] FIG. 14 shows the operation of printing a photograph performed by the terminal 2 in the system of FIG. 1. First, in step d1, the GUI shown in FIG. 15 is displayed, and whether or not the option "advertisement added" has been selected via the operation panel 305 is examined. If selected, the process proceeds to step d2. Otherwise, the process proceeds to step d3. In step d2, a flag is set to distinguish the selection of "advertisement added". In step d3, the GUI shown in FIG. 16 is displayed to allow selection of a photograph desired via the operation panel 305. This selection is performed in a general manner of manipulating a stick to move a cursor and pressing a button to confirm the entry. In step d4, whether or not the selection end button has been pressed is examined. If pressed, the process proceeds to step d5. Otherwise, the selection in step d3 is continued. In step d5, the total amount of charge, calculated from the number of selected photographs and the state of the flag, is displayed prompting to drop coins in the slot. In step d6, whether or not the amount displayed in step d5 has been paid is examined. If paid, the process proceeds to step d7, where the outline of the print is displayed on the display 301. In step d8, whether or not the flag of "advertisement added" has been set is examined. If set, the process proceeds to step d10. Otherwise, the process proceeds to step d9, where the selected photograph is output via the printer 308, and the process is terminated. In step d10, advertisement data is retrieved from the advertising server 3. More types of advertisements should be retrieved as the number of selected photographs increases. For example, assuming that the advertising server 3 has five types of advertisements, four types of advertisements are randomly retrieved if the number of photographs is less than five, and all the five types are retrieved if the number of photographs is five or more. In step d11, the advertisement retrieved in step d10 is added to the selected photograph. When the number of selected photographs is greater than the number of types of advertisements, the advertisements are randomly selected for the excessive photographs.

[0025] FIG. 17 shows an example of the synthesized print output when the option "advertisement added" was selected. In FIG. 17, the selected photograph is printed on the upper part of the print while the advertisement is printed on the lower part. The printing sheet may be perforated as the example in FIG. 17 so that the advertise-

ment part can be torn off from the photograph part. This will afford convenience to the advertiser who intends to launch a campaign such as a prize contest urging the users to collect a plurality of torn-off advertisement coupons and send an entry form as shown in FIG. 18. In addition, for users who are to store printed photographs, the storage space can be saved by tearing off the advertisement part.

[0026] In the illustrated example, the advertisement data are held by the advertising server 3. Alternatively, a cache may be provided in the HDD 307 of the terminal 2, and the type of advertisement that has been previously retrieved may be held in the cache. In this case, the advertising server 3 may only be notified of the use. As yet another method, the terminal 2 may periodically download advertisement data from the advertising server 3, and simultaneously notify the advertising server 3 of the number of advertisements actually printed. The system of the present invention may also be applied to commercially available semiconductor memories such as compact flash (CF) cards. That is, a reader for reading image data accumulated in such a semiconductor memory may be provided in the system, in place of the camera receiving recess 302 and the input terminal 303, to enable execution of the procedures of steps d1 through d11 for the image data while omitting the procedures of steps c1 through c8.

[0027] FIG. 19 illustrates a detailed construction of the advertising server 3 in the system of FIG. 1. Referring to FIG. 19, a connection request processing section 501 processes a connection request from the terminal 2, and a terminal verification processing section 502 verifies the terminal that has sent a connection request. An advertisement counter 503 counts the number of advertisements added to photograph prints at the terminal 2 for each type. An advertisement management section 504 manages updating of the advertisements to be distributed to the terminal 2 by examining the time stamps and the like attached to the advertisements. An advertisement accumulation section 505 accumulates advertisement data, and an advertisement transmission section 506 transmits advertisement data to the terminal 2. Note that the advertisements in the advertisement accumulation section 505 are updated by the operator for the advertising server 3.

[0028] FIG. 20 shows the advertisement distribution operation of the advertising server 3 in the system of FIG. 1. In this embodiment, assume that an advertisement list has been distributed in advance to the terminal 2, and at the synthesis of a print, the advertisement to be added to a photograph is determined and the determined advertisement data is retrieved from the advertising server 3. Assume also that whenever advertisement data is updated, the terminal 2 downloads an updated advertisement list from the advertising server 3. Moreover, assume that the advertisement supplier can set the upper limit for the advertisement counter 503 for each advertisement data so as to prevent the advertise-

ment cost from greatly exceeding a predicted value due to unexpectedly high use rate. In step e1, whether or not a connection request from the terminal 2 has been received is examined. If received, the process proceeds to step e2, where the terminal 2 is verified by requesting the terminal 2 to send its ID and password. In step e3, whether or not the verification of the terminal 2 has succeeded is examined. If succeeded, the process proceeds to step e4. Otherwise, the process is terminated. In step e4, whether or not updating has been made for the advertisement data in the advertisement accumulation section 505 is examined. If made, the process proceeds to step e5. Otherwise, the process proceeds to step e6. In step e5, the advertisement list in the terminal 2 is updated. In step e6, the advertisement request from the terminal 2 is accepted. In step e7, whether or not the counter value for the requested advertisement has exceeded a preset value is examined. If the value has exceeded, the process proceeds to step e8. Otherwise, the process proceeds to step e9. In step e8, the advertisement is changed to one for which the advertisement counter value is minimum. In step e9, the advertisement data is read from the advertisement accumulation section 505 and transmitted to the terminal 2. In step e10, the counter value for the advertisement data transmitted in step e9 is incremented by one.

[0029] In this embodiment, the counters 503 for the respective advertisement data added to the photograph prints are collectively managed by the advertising server 3. This enables the advertising server 3 to bill each advertiser for the advertisement charge corresponding to the number of prints to which the advertisement was added. Specifically, as shown in FIGS. 3 and 4, the advertising server 3 outputs a billing statement corresponding to the count of the advertisement counter 503 to each advertiser. Part of the received payment is passed on to compensate the discount of the prints, and the remainder can be the income from the advertising.

[0030] In this embodiment, advertisement data from advertisers are stored in the advertising server 3. Alternatively, character-featuring designs may be provided as a tie-up project with an amusement park or the like and added to photographs of users who want the designs at value-added charges.

[0031] The maintenance server 4 will be described. The terminal 2 notifies the maintenance server 4 of occurrence of any inconvenience such as out of paper, out of ink, and paper jam when such inconvenience occurs by use of the network connection function of the terminal 2. By this operation, swift maintenance of the terminal 2 is attained.

[0032] The photograph data may also be transmitted by e-mail from the terminal 2. In the above embodiment, data read by the terminal 2 from the digital camera 1 was printed with the printer 308. Alternatively, the read photograph data may be sent by e-mail to a desired destination by use of the modem 309 and the communica-

tion control section 405. To realize this function, after a photograph is selected at the GUI shown in FIG. 16, for example, the GUI shown in FIG. 21 may be displayed to prompt the user to select the method by which the photograph is output. If the option "send the photograph by e-mail" is selected, the GUI for input of an e-mail address as shown in FIG. 22 is displayed on the display 301. As in the case of printing the photograph, if the option "advertisement added" had been selected, the resultant photograph data attached to the e-mail includes an advertisement as shown in FIG. 23. According to this method, it is possible, for example, to send a picture card to a friend from the terminal 2 on the road. Characters can be written on the image or a message can be input by use of a touch pen or the like. Naturally, the photograph data may be sent to the user's own e-mail address to be processed later by the user for use in a greeting card and the like.

[0033] If the option "hold the photograph on the Web" is selected as the photograph output destination shown in FIG. 21, the GUI for setting a password as shown in FIG. 24 is displayed. Setting of the user's password is requested to prevent access of an outsider to the photograph data. Once the photograph is held in the photograph server 5 on the Web, the terminal 2 outputs a card as shown in FIG. 25. Since only a limited amount of data can be held on the Web, it is realistic to hold photograph data for only a limited period of time. The card shown in FIG. 25 includes the address for accessing the Web, the ID, and the expiry date until which the photograph data is held. The password is not printed to prevent access of an outsider to the photograph data in case that the card is lost. When the user accesses the photograph server 5, a screen as shown in FIG. 26, for example, is displayed. By inputting the ID found on the card and the password set at the GUI shown in FIG. 24, a screen as shown in FIG. 27 is displayed. The screen includes the photographs taken displayed in a thumbnail sketch and a banner advertisement arranged at a predetermined position. The user is now allowed to download the photograph data freely. According to this method, for example, the user can go to a pleasure resort without carrying a camera and rent a digital camera at the resort to take photographs. Afterwards, the user can process the photographs freely, and also share the photograph data with a friend by notifying the friend of the ID and the password. It should be noted that the illustrated GUIs and the Web registration information card shown in FIG. 25 are mere examples. For these GUIs and cards, other designs may be adopted.

[0034] Naturally, the function of selecting "advertisement added" or "no advertisement added" may be omitted, so that an advertisement is always added to a photograph.

[0035] While the present invention has been described in a preferred embodiment, it will be apparent to those skilled in the art that the disclosed invention may be modified in numerous ways and may assume many

embodiments other than that specifically set out and described above. Accordingly, it is intended by the appended claims to cover all modifications of the invention that fall within the true spirit and scope of the invention.

Claims

1. A digital photograph system comprising:
 - a camera having a function of storing data of a digital photograph taken; and
 - a terminal for reading the photograph data stored in the camera, outputting the photograph data, and thereafter collecting the camera for recycling.
2. The digital photograph system of Claim 1, wherein the camera includes means for verifying an apparatus that reads the photograph data, to prevent the photograph data from being read from the camera by an apparatus other than a predetermined terminal.
3. The digital photograph system of Claim 1, wherein the terminal includes a printer for printing the photograph data read from the camera.
4. The digital photograph system of Claim 1, further comprising a maintenance server connected to the terminal via a network, wherein the terminal has a function of notifying the maintenance server of an inconvenience occurring in the terminal.
5. The digital photograph system of Claim 1, wherein the terminal has a function of transmitting the photograph data read from the camera by e-mail.
6. The digital photograph system of Claim 1, further comprising a photograph server connected to the terminal via a network, wherein the terminal has a function of entering the photograph data read from the camera in a predetermined Web page of the photograph server.
7. A digital photograph system comprising:
 - a camera having a function of storing data of a digital photograph taken;
 - a terminal for reading the photograph data stored in the camera and outputting the photograph data; and
 - an advertising server connected to the terminal via a network,
 - wherein the advertising server provides advertisement data to be added to the photograph data output from the terminal.
8. The digital photograph system of Claim 7, wherein the advertising server has a function of distributing an updated advertisement list to the terminal.
9. The digital photograph system of Claim 7, wherein the advertising server includes a counter for counting the number of times of supply of the advertisement data to the terminal, and has a function of outputting a billing statement corresponding to the count value of the counter to an advertiser.
10. The digital photograph system of Claim 7, wherein the terminal has a printer for printing the photograph data read from the camera together with the advertisement data supplied from the advertising server.
11. The digital photograph system of Claim 10, wherein an output of the printer includes perforation at the boundary of a photograph data printed part and an advertisement data printed part.
12. The digital photograph system of Claim 7, further comprising a maintenance server connected to the terminal via a network, wherein the terminal has a function of notifying the maintenance server of an inconvenience occurring in the terminal.
13. The digital photograph system of Claim 7, wherein the terminal has a function of transmitting the photograph data read from the camera by e-mail together with the advertisement data supplied from the advertising server.
14. The digital photograph system of claim 7, further comprising a photograph server connected to the terminal via a network, wherein the terminal has a function of entering the photograph data read from the camera together with the advertisement data supplied from the advertising server in a predetermined Web page of the photograph server.

FIG. 1

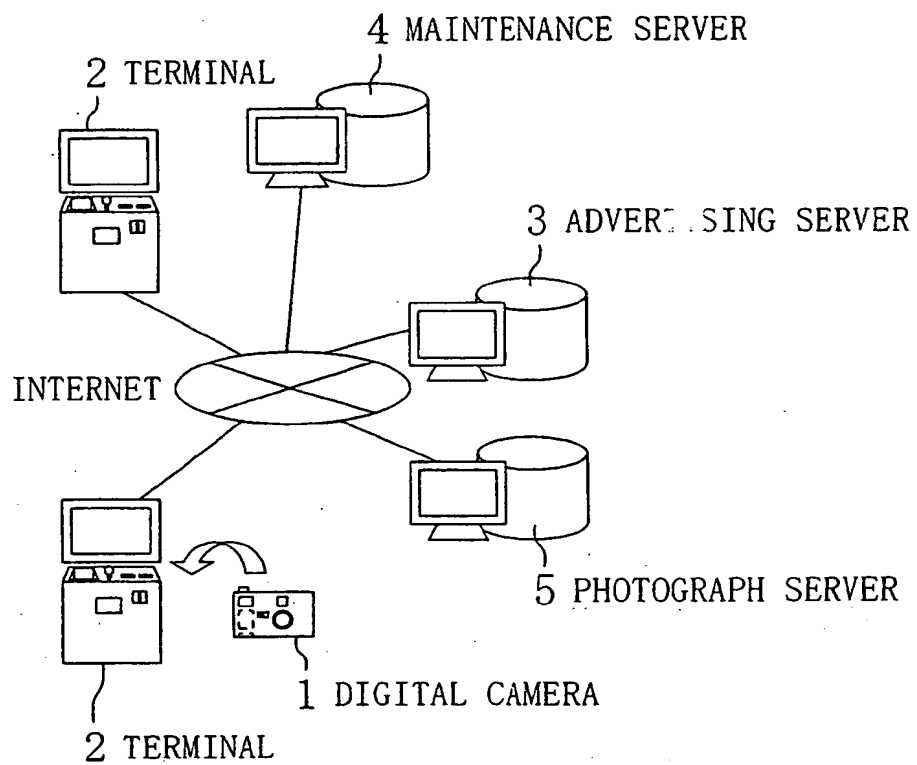


FIG. 2

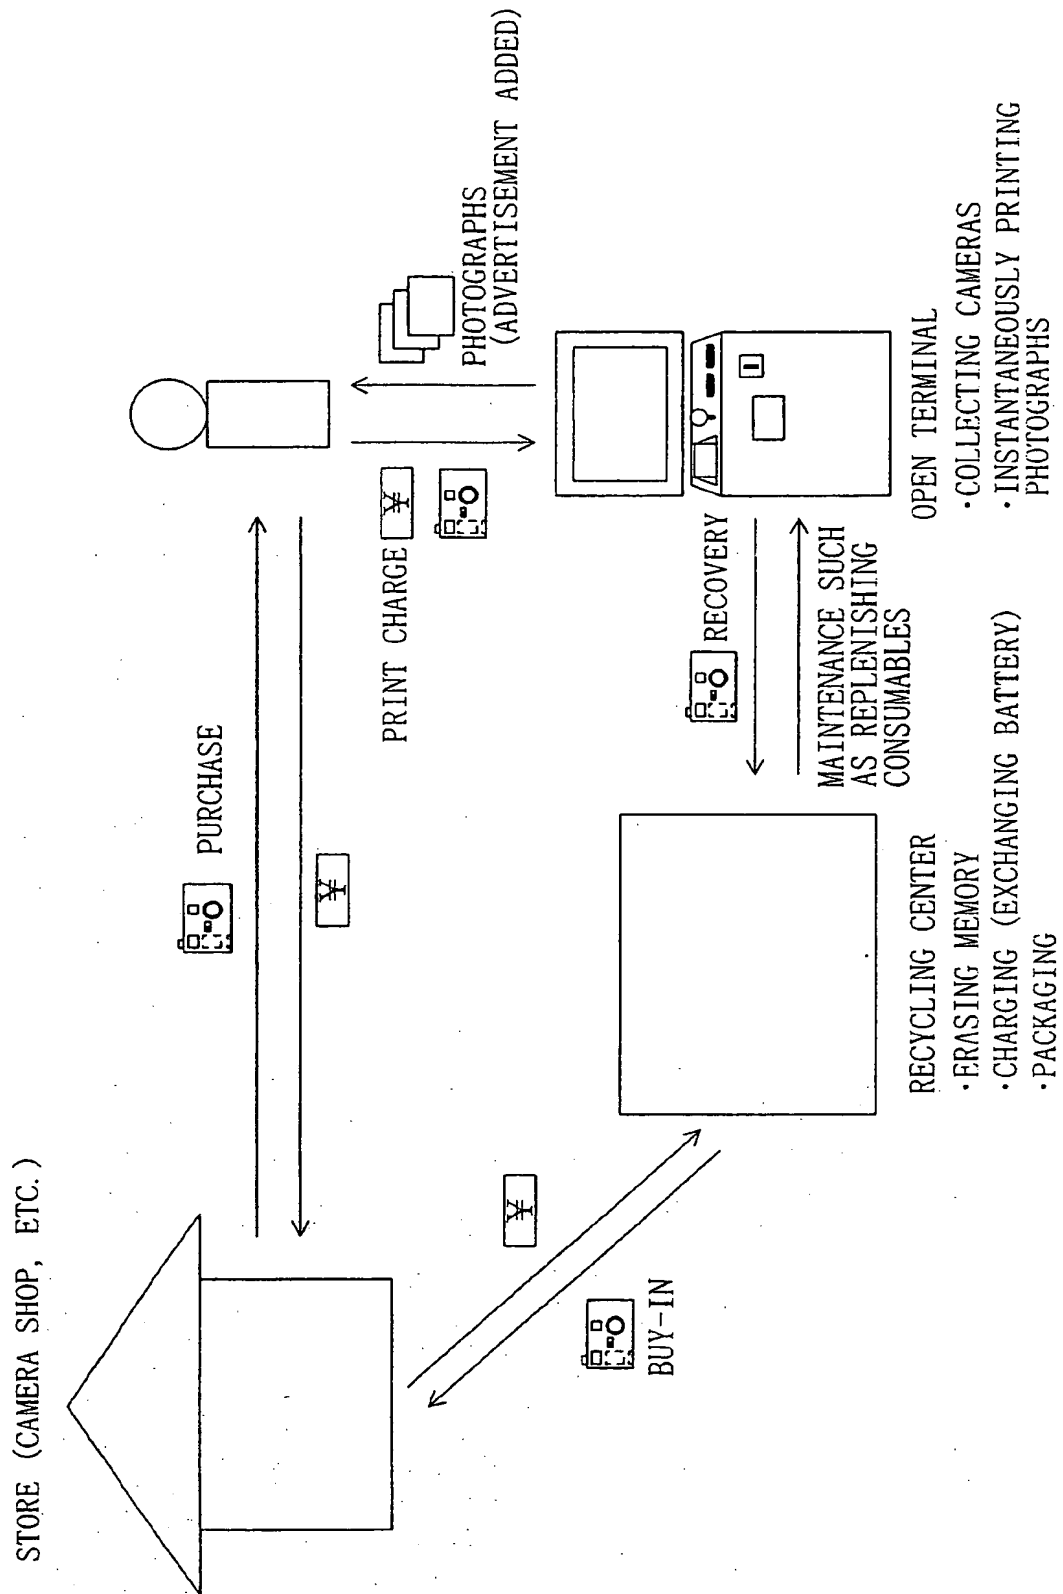


FIG. 3

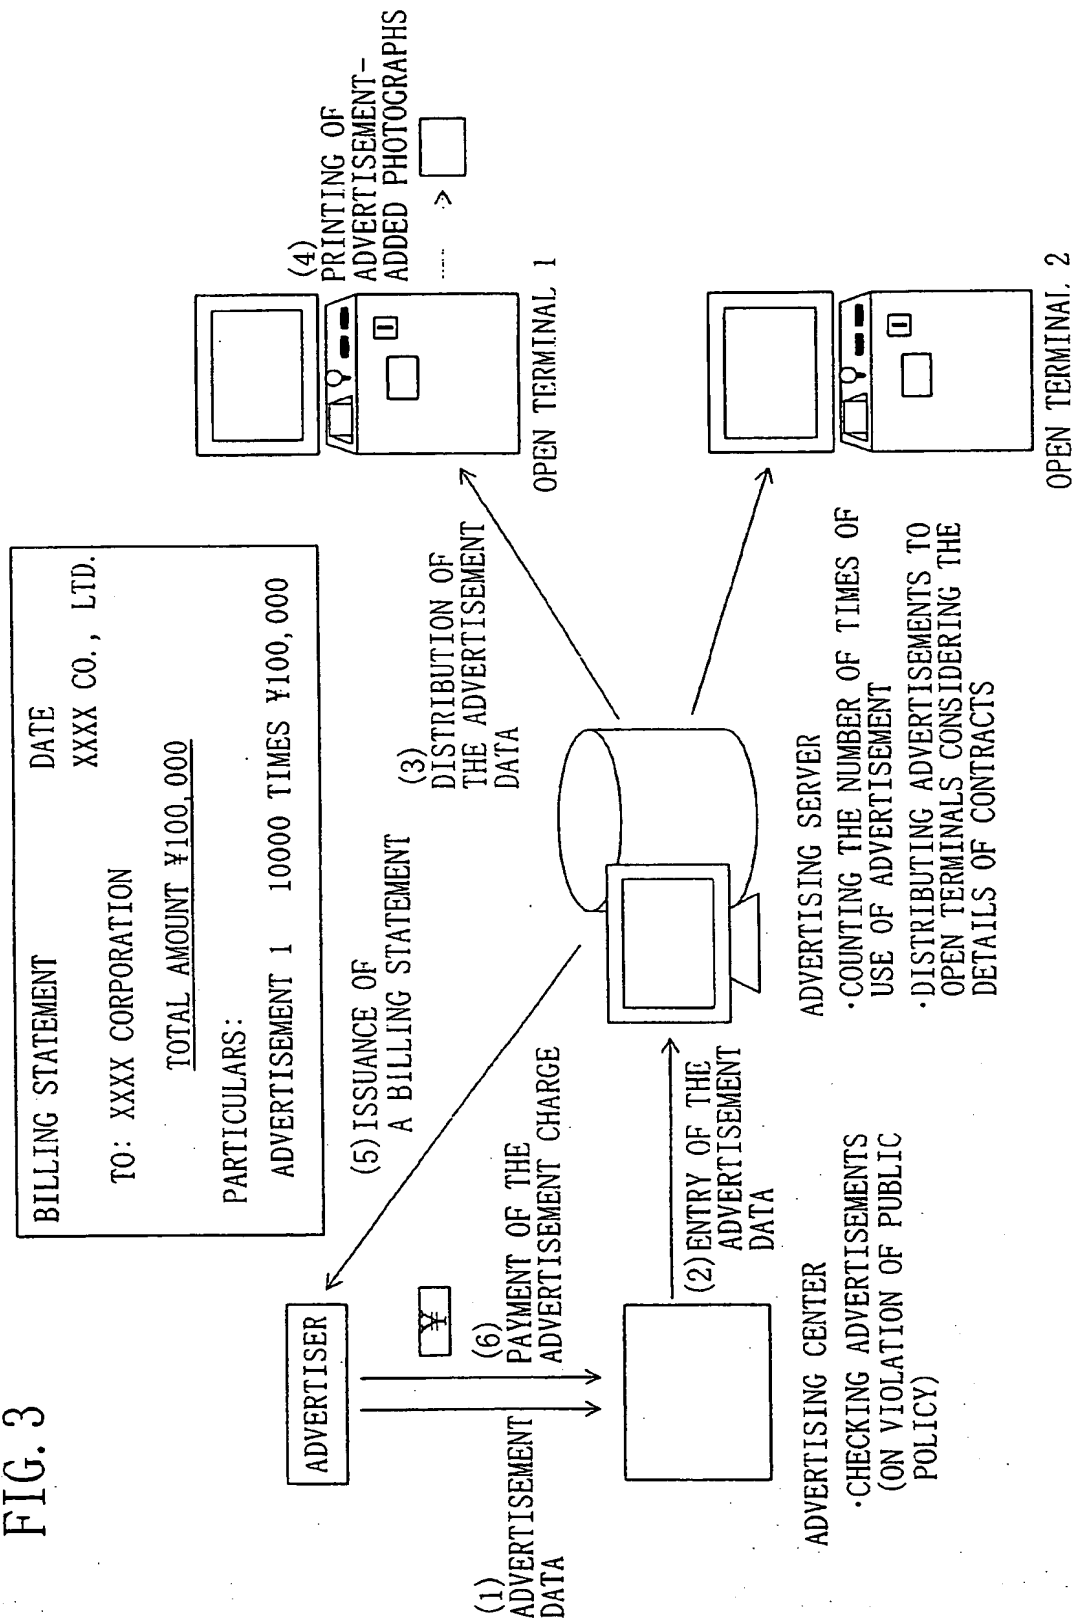


FIG. 4

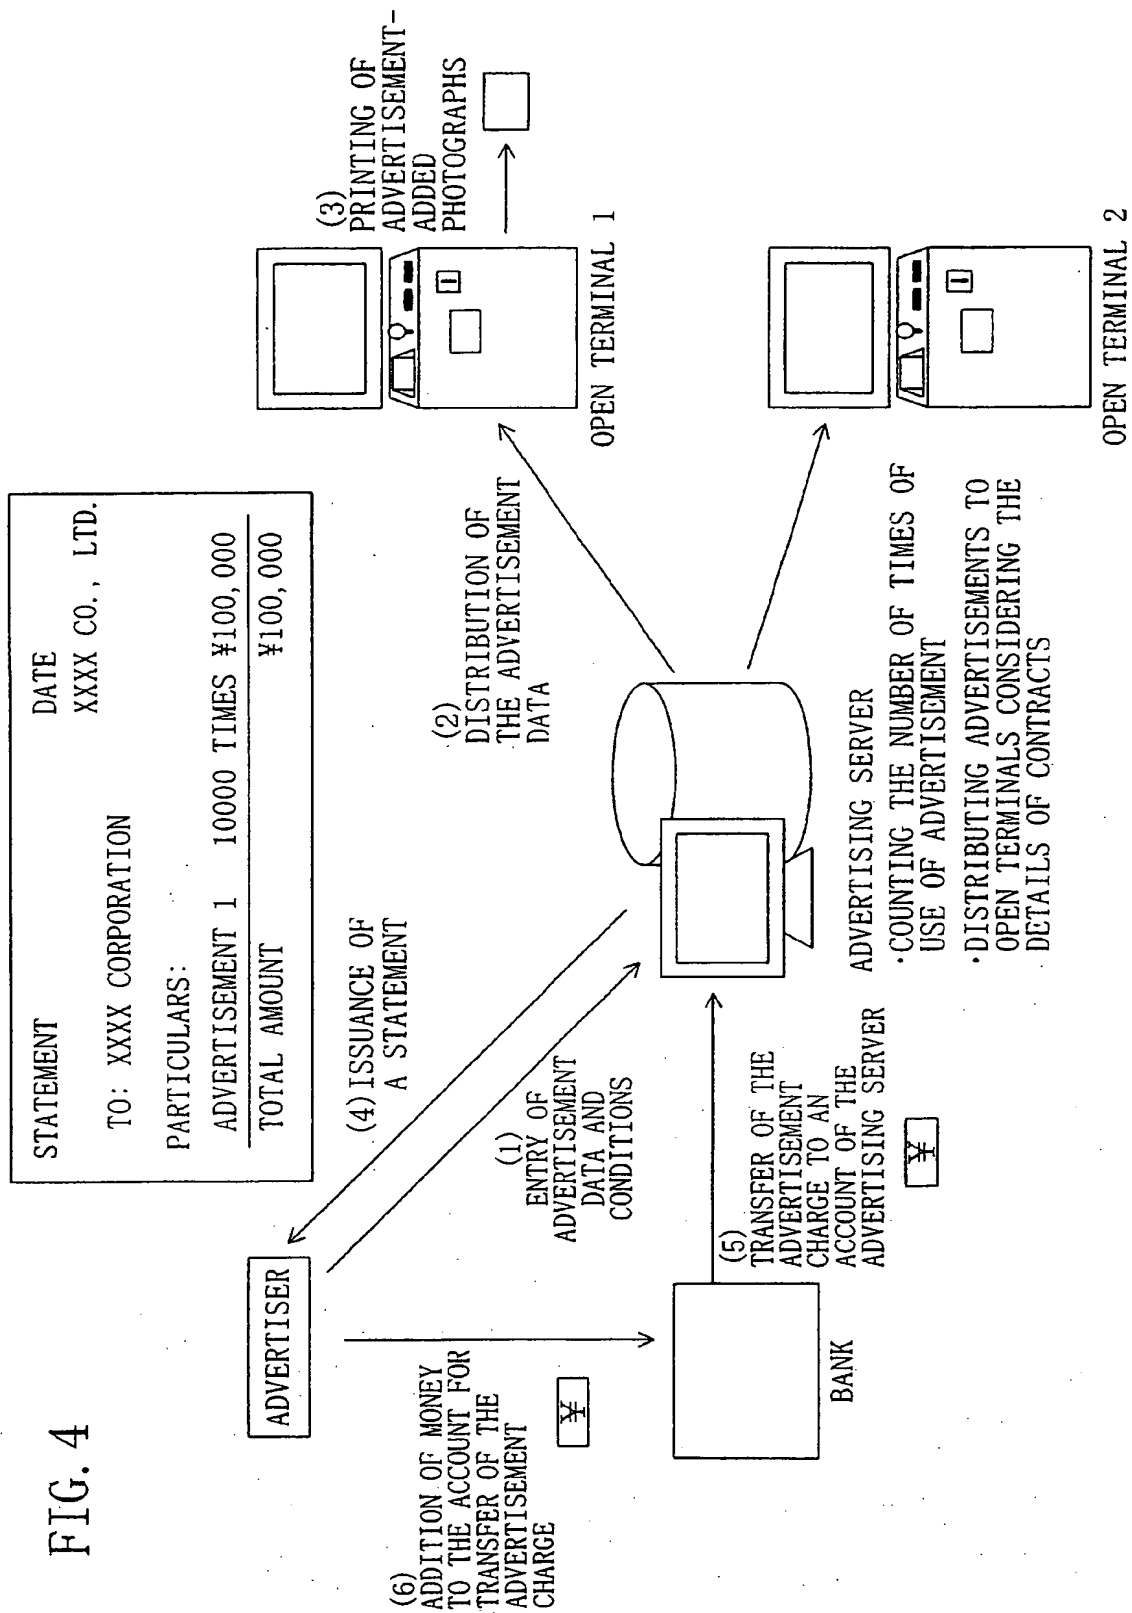


FIG. 5

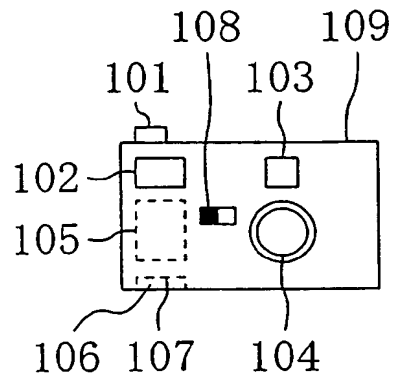


FIG. 6

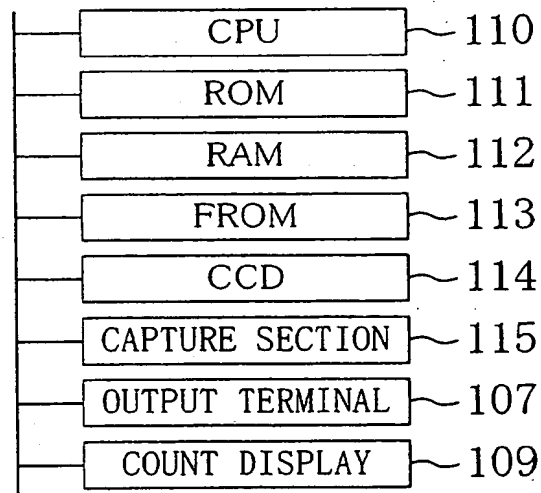


FIG. 7

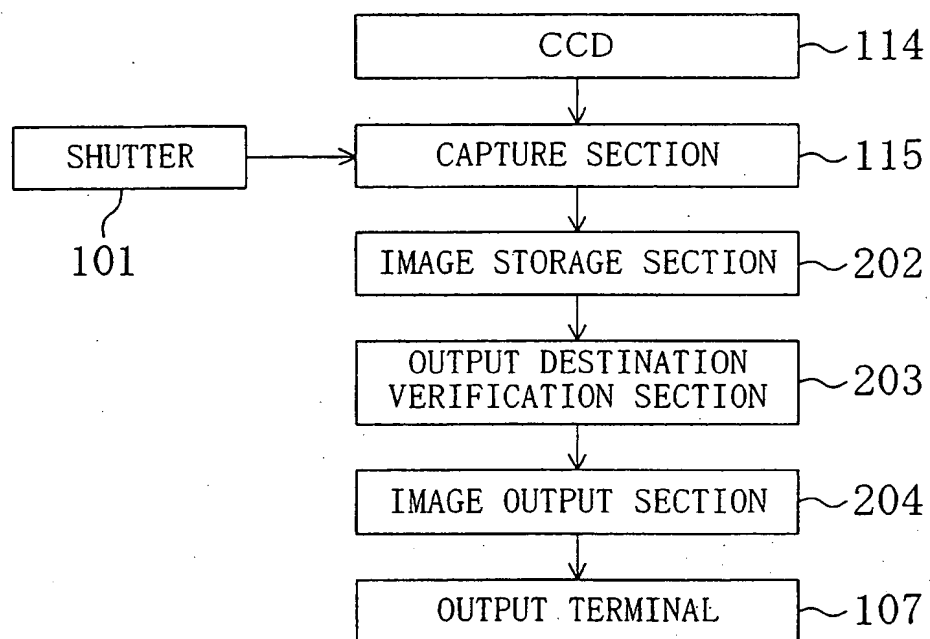


FIG. 8

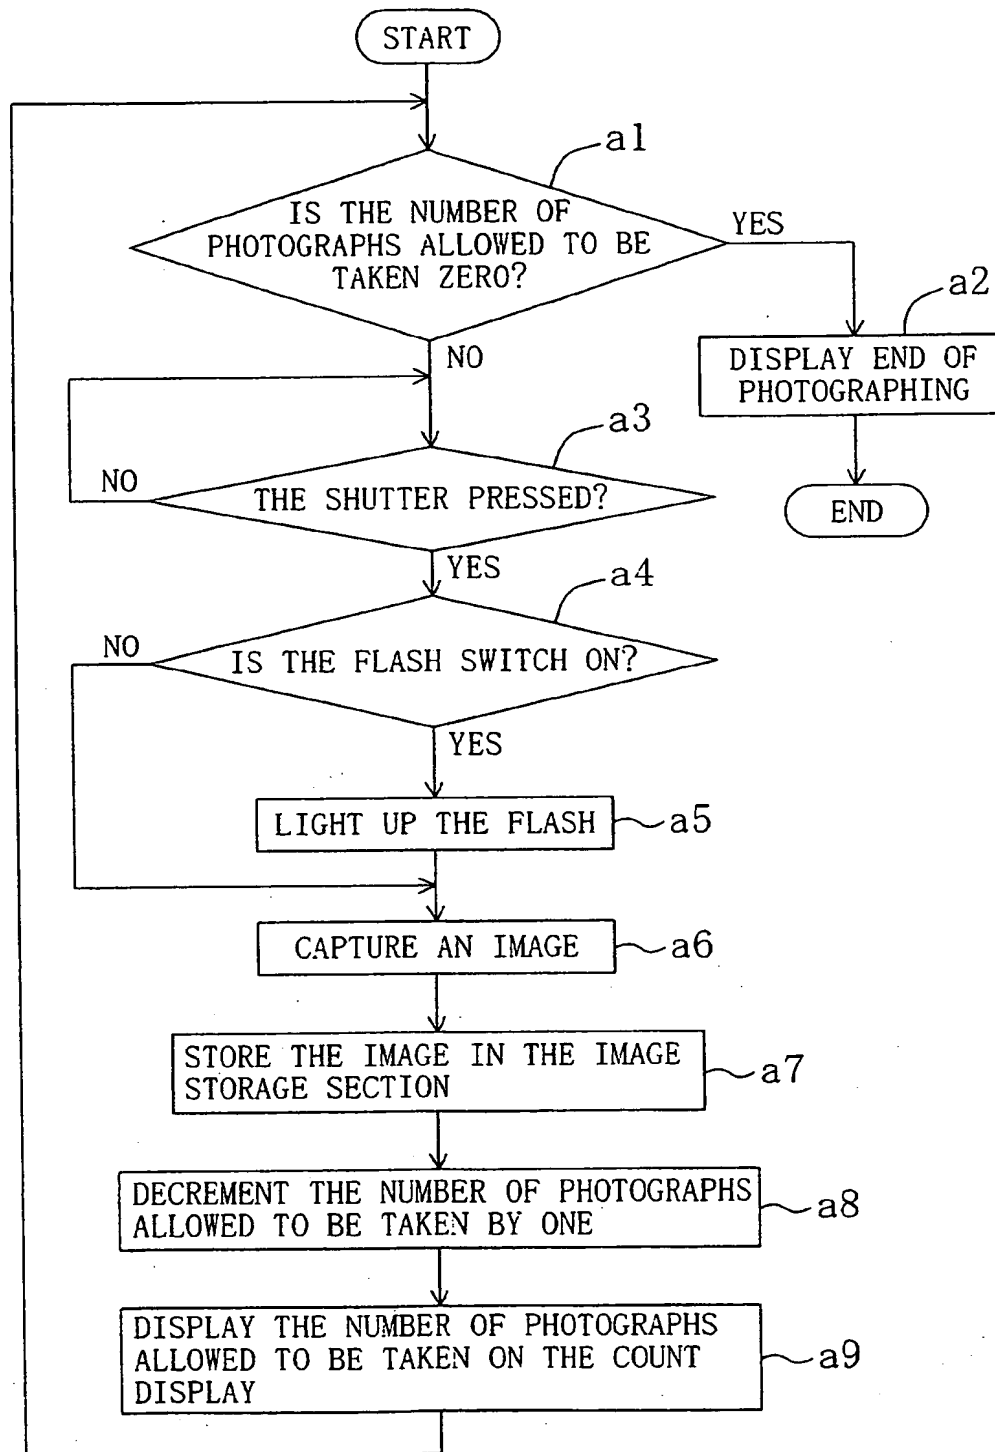


FIG. 9

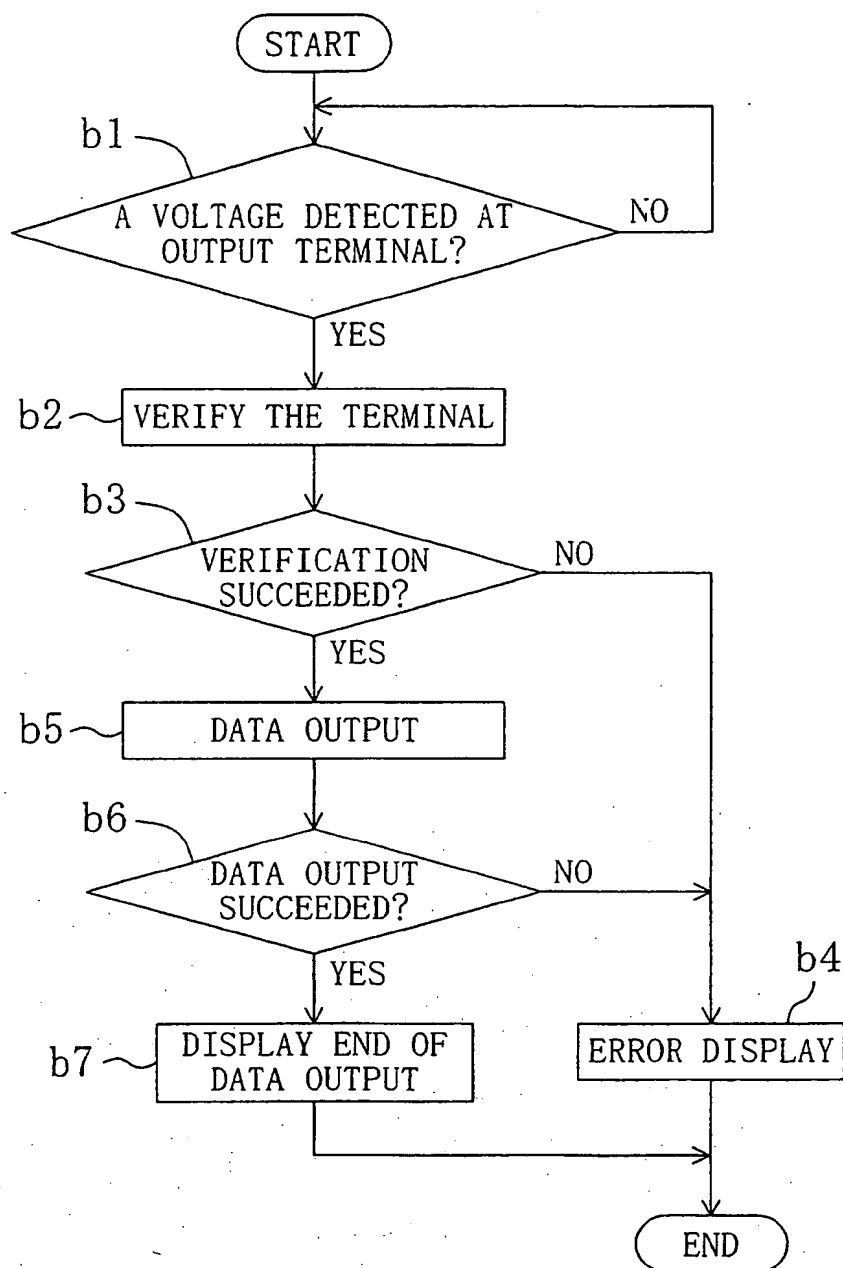


FIG. 10

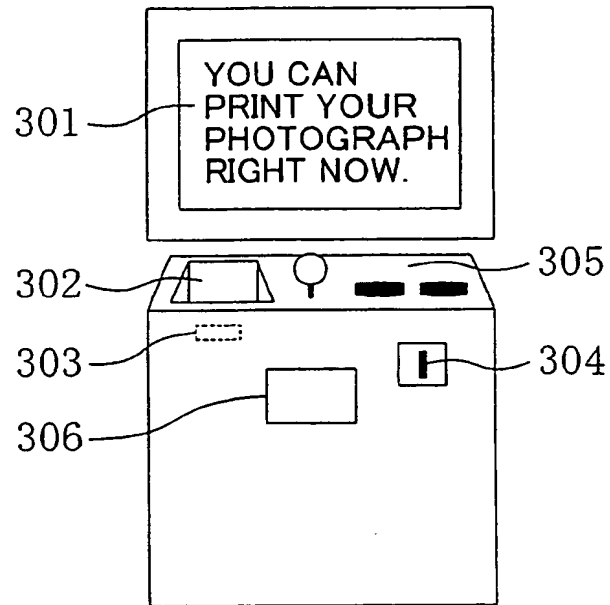


FIG. 11

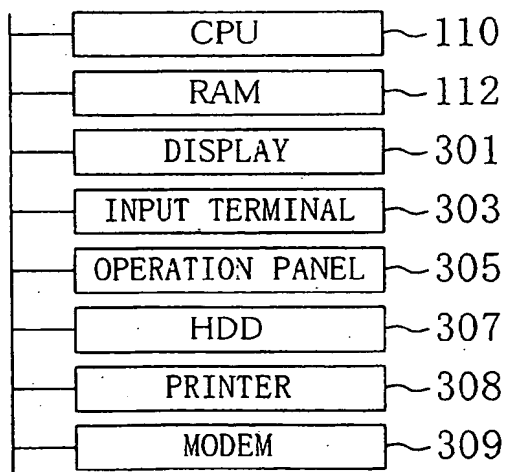


FIG. 12

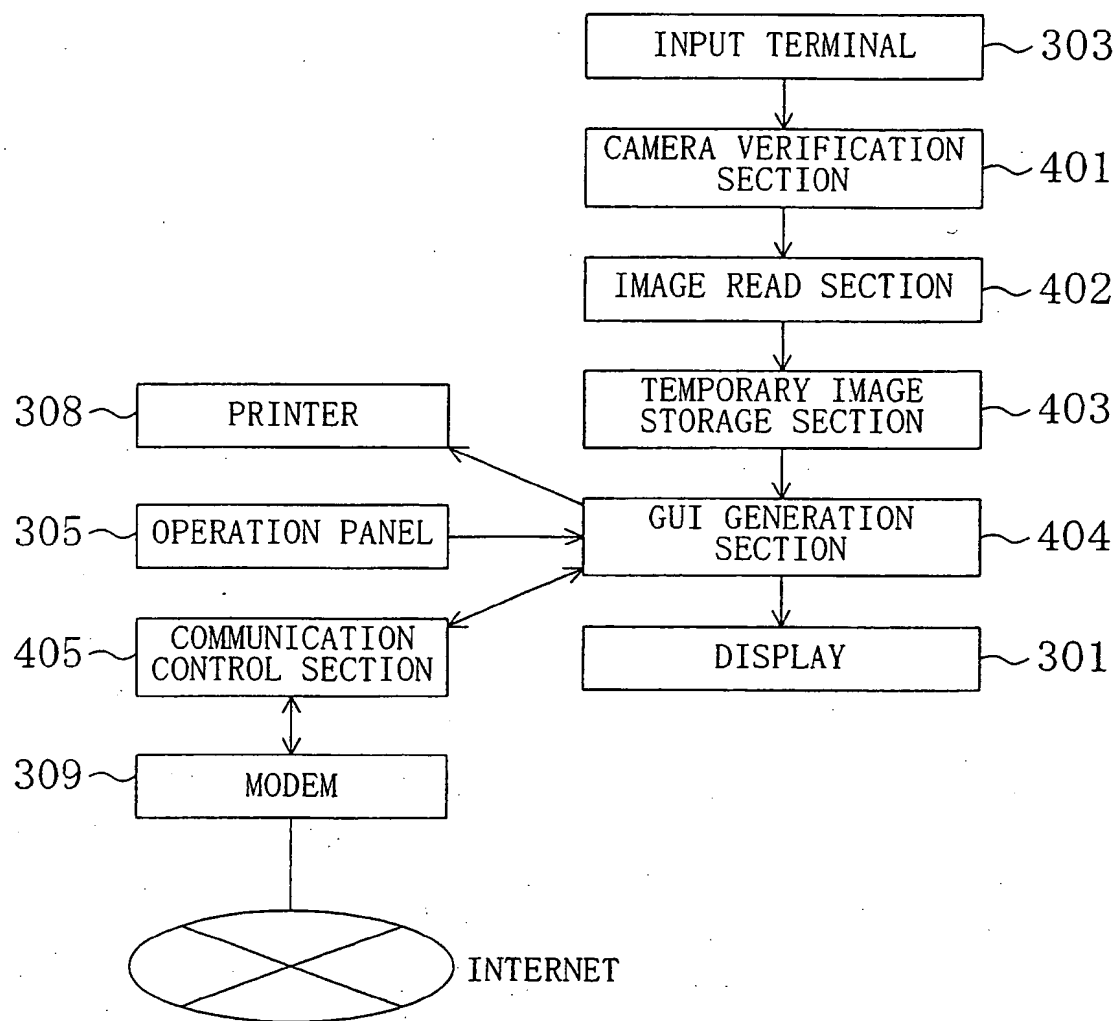


FIG. 13

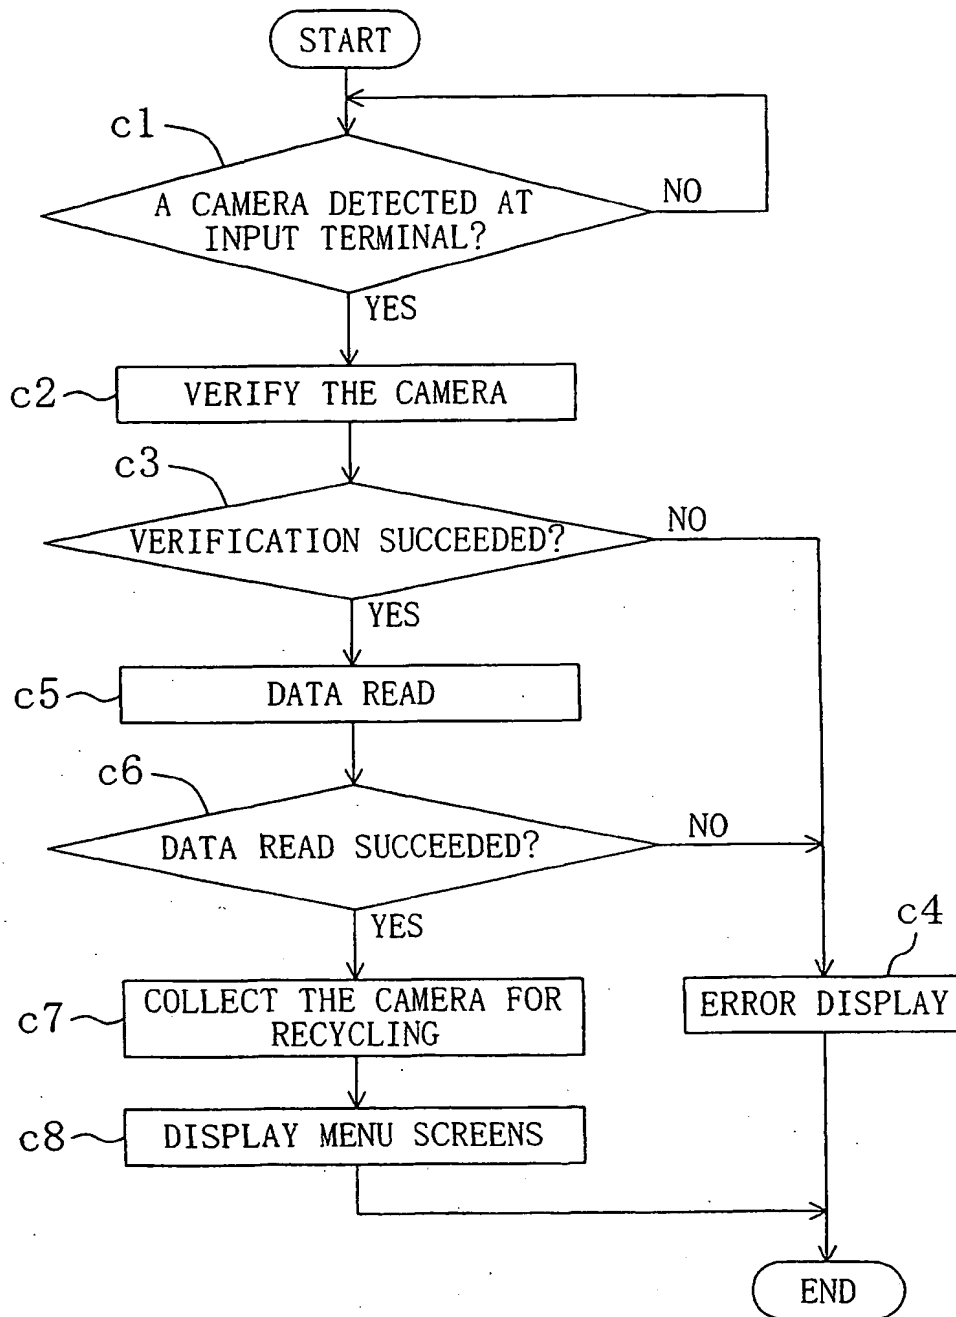


FIG. 14

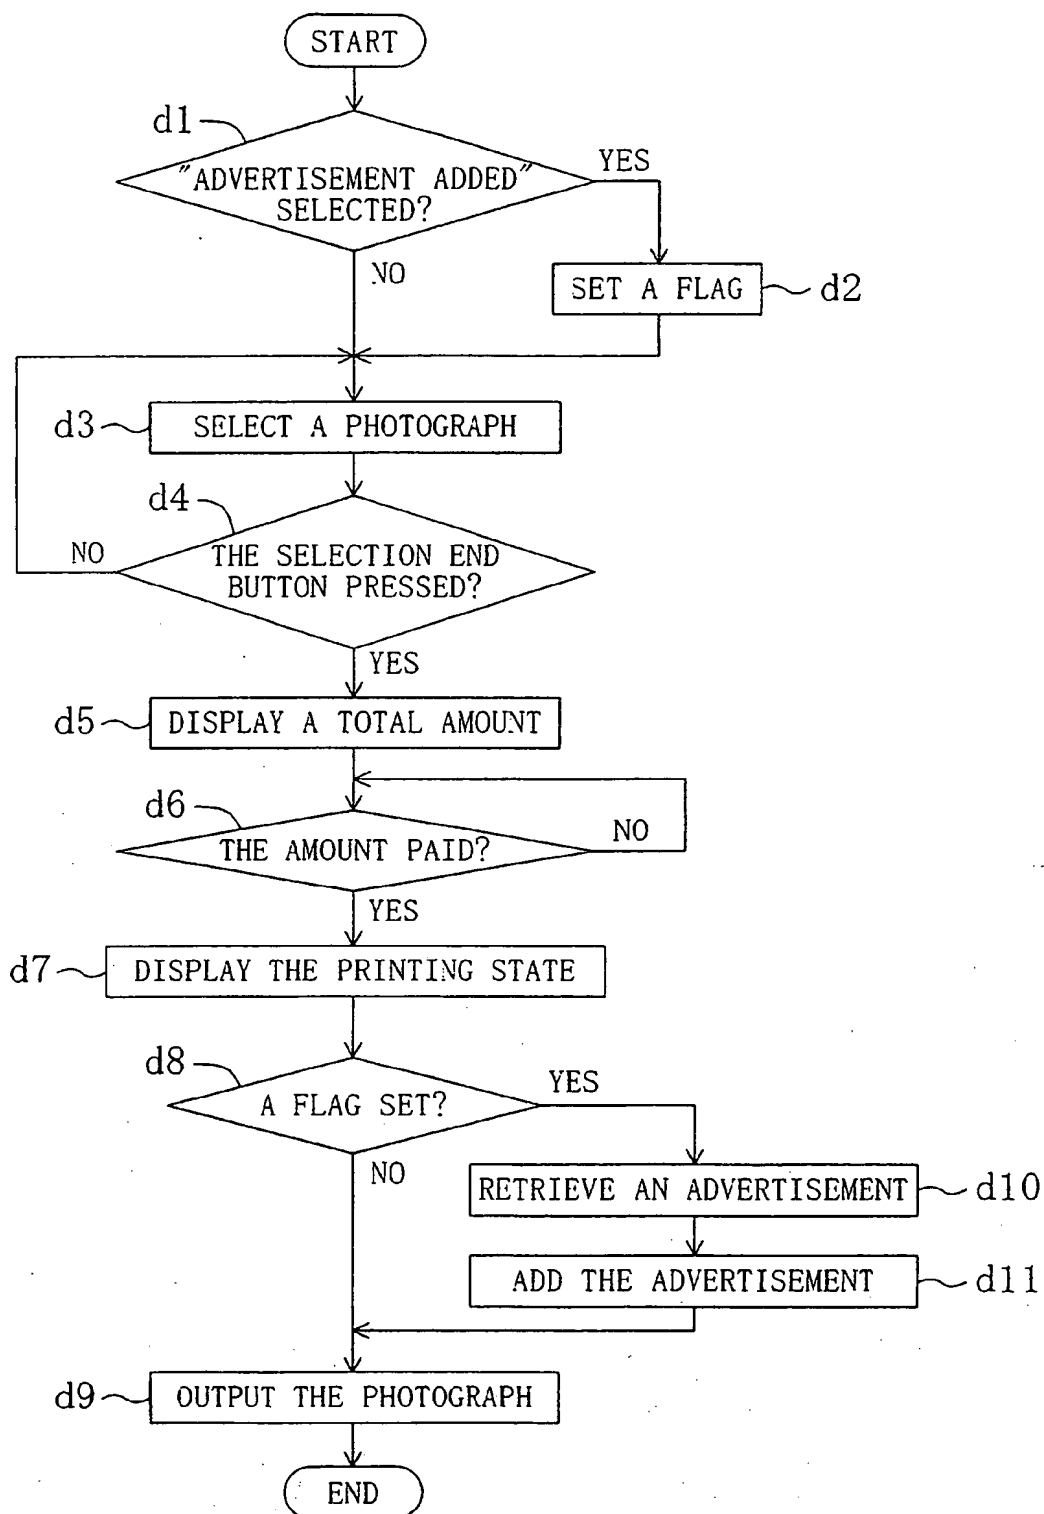


FIG. 15


SELECT THE TYPE
YOU LIKE


NO ADVERTISEMENT ADDED ¥50/SHEET	ADVERTISEMENT ADDED ¥30/SHEET
---	-------------------------------------


FIG. 16

SELECT
PHOTOGRAPH(S)
TO BE PRINTED 2/36


BACKWARD









FORWARD








SELECTION END

FIG. 17

PHOTOGRAPH TAKEN



PERFORATION

ADVERTISEMENT

CONTEST
ENTRY
COUPON

XXXX CO., LTD.

FIG. 18

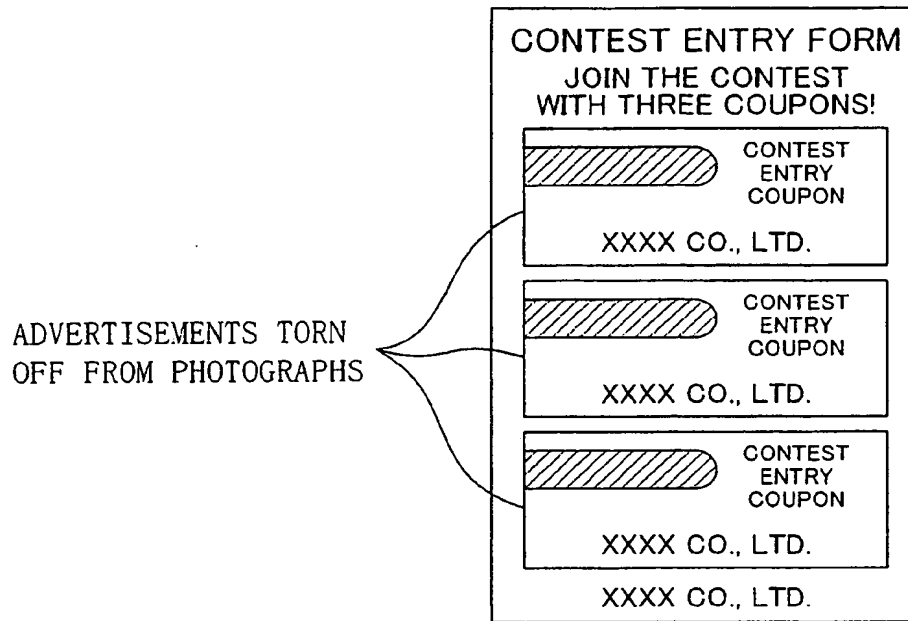


FIG. 19

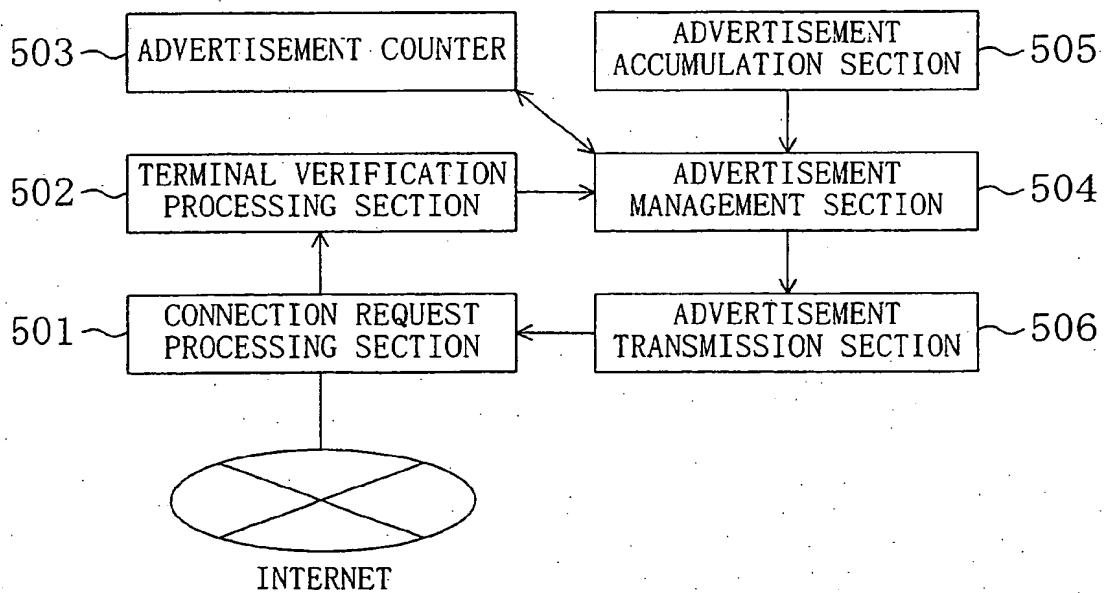


FIG. 20

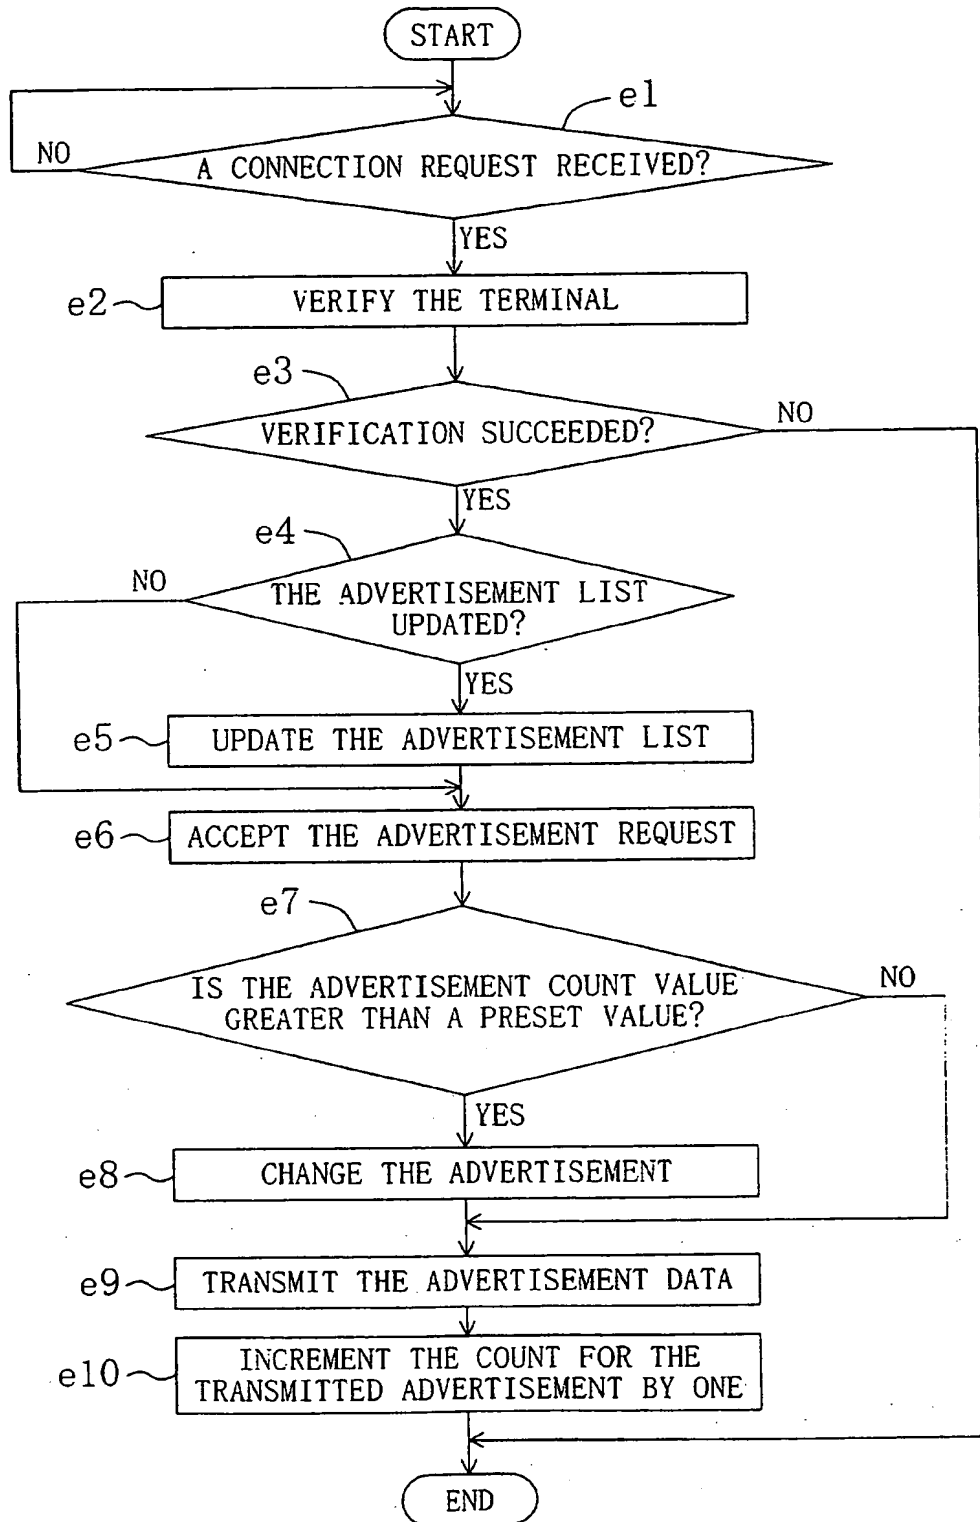


FIG. 21

SELECT THE OUTPUT METHOD

PRINT THE PHOTOGRAPH

SEND THE PHOTOGRAPH BY E-MAIL

HOLD THE PHOTOGRAPH ON THE WEB

FIG. 22

INPUT E-MAIL ADDRESS
(BE CAREFUL TO ENTER
THE CORRECT ADDRESS)

matsushita@

a-c	e-g	h-j	l-n	o-q
s-u	v-x	y,z	@	.

DELETE

FIG. 23

PHOTOGRAPH TAKEN

ADVERTISEMENT

IF YOU BUY DIGITAL
PRODUCTS, CHOOSE XXX.

FIG. 24

INPUT PASSWORD (8 DIGITS)
(BE SURE NOT TO FORGET)

☆☆

0	1	2	3	4
5	6	7	8	9

DELETE

FIG. 25

THANK YOU FOR YOUR
USE OF OUR SERVICE.

<http://www.OΔ.com>

YOUR ID

a1A51d!2z

EXPIRY DATE
2000/01/07

FIG. 26

URL: <http://www.OΔ.com>


INPUT YOUR ID AND
PASSWORD

ID a1A51d!2z


PW *****

TRANSMIT CANCEL

FIG. 27

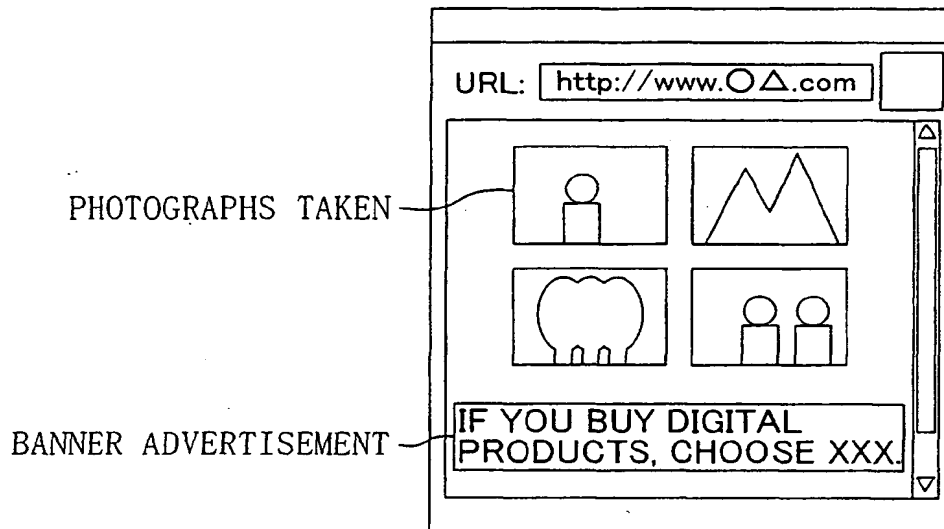

THIS PAGE BLANK (USPTO)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 1 148 702 A3**

(12) **EUROPEAN PATENT APPLICATION**

(88) Date of publication A3:
14.04.2004 Bulletin 2004/16

(51) Int Cl.7: **H04N 1/21, H04N 1/00**

(43) Date of publication A2:
24.10.2001 Bulletin 2001/43

(21) Application number: **01109534.6**

(22) Date of filing: **17.04.2001**

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR**
Designated Extension States:
AL LT LV MK RO SI

- **Kutsumi, Hiroshi**
Moriguchi-shi, Osaka 570-0042 (JP)
- **Ozawa, Jun**
Nara-shi, Nara 631-0005 (JP)
- **Noguchi, Eiji**
Sakai-shi, Osaka 591-8021 (JP)
- **Maruno, Susumu**
Kyotanabe-shi, Kyoto 610-0354 (JP)

(30) Priority: **17.04.2000 JP 2000114863**

(71) Applicant: **MATSUSHITA ELECTRIC INDUSTRIAL
CO., LTD.**
Kadoma-shi, Osaka 571-8501 (JP)


(74) Representative: **Grünecker, Kinkeldey,
Stockmair & Schwanhäusser Anwaltssozietät
Maximilianstrasse 58
80538 München (DE)**

(72) Inventors:
• **Matsuura, Satoshi**
Kyotanabe-shi, Kyoto 610-0300 (JP)

(54) **Digital photograph system**

(57) A digital camera used for taking photographs is connected to a terminal to print one or more selected among the photographs on the spot. An advertisement supplied from an advertising server is added to the bottom of the printed photograph, to reduce the proportion of cost borne by the user with the advertisement charge. After the photograph is printed, the digital camera is collected by the terminal for recycling. The photograph can also be temporarily uploaded to the Web, so that the user can download the photograph to the user's personal computer afterwards.

FIG. 1

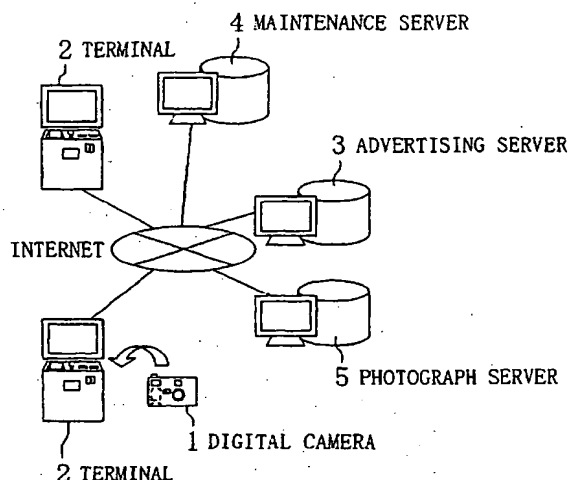

EP 1 148 702 A3



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 01 10 9534

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IntCl.7)
X	PATENT ABSTRACTS OF JAPAN vol. 1999, no. 13, 30 November 1999 (1999-11-30) & JP 11 234542 A (OLYMPUS OPTICAL CO LTD), 27 August 1999 (1999-08-27) * abstract * * paragraphs [0018] - [0020] *	1	H04N1/21 H04N1/00
A	EP 0 560 101 A (EASTMAN KODAK CO) 15 September 1993 (1993-09-15) * abstract *	2	
Y	US 5 513 254 A (MARKOWITZ ROBERT E) 30 April 1996 (1996-04-30) * abstract * * column 3, line 49 - line 64 * * column 5, line 4 - line 24 * * figure 1 *	7-14	
Y	EP 0 981 246 A (SEIKO EPSON CORP) 23 February 2000 (2000-02-23) * paragraphs [0023], [0034], [0050], [0059], [0060] *	7-14	TECHNICAL FIELDS SEARCHED (IntCl.7) H04N
Y	EP 0 984 406 A (CEWE COLOR AG & CO) 8 March 2000 (2000-03-08) * paragraphs [0021], [0026], [0028] *	7-10, 12-14	
Y	EP 0 860 980 A (EASTMAN KODAK CO) 26 August 1998 (1998-08-26) * page 2 - page 5 *	7-10, 12-14	
Y	EP 0 830 008 A (EASTMAN KODAK CO) 18 March 1998 (1998-03-18) * column 1, line 37 - line 52 * * column 11, line 35 - column 12, line 4 *	7-10, 12-14	
		-/--	
The present search report has been drawn up for all claims			
Place of search The Hague		Date of completion of the search 10 February 2004	Examiner Azaustre Maleno, V
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03/82 (P4/C01)



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 01 10 9534

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
Y	PATENT ABSTRACTS OF JAPAN vol. 1999, no. 12, 29 October 1999 (1999-10-29) & JP 11 192760 A (CANON INC), 21 July 1999 (1999-07-21)	7	
A	* abstract *	9	
A	----- PATENT ABSTRACTS OF JAPAN vol. 1999, no. 08, 30 June 1999 (1999-06-30) & JP 11 069024 A (SONY CORP), 9 March 1999 (1999-03-09) * abstract * -----	7	
The present search report has been drawn up for all claims			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
Place of search The Hague		Date of completion of the search 10 February 2004	Examiner Azaustre Maleno, V
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03.82 (P04C01)



European Patent
Office

Application Number
EP 01 10 9534

CLAIMS INCURRING FEES

The present European patent application comprised at the time of filing more than ten claims.

- ☐ Only part of the claims have been paid within the prescribed time limit. The present European search report has been drawn up for the first ten claims and for those claims for which claims fees have been paid, namely claim(s):
- ☐ No claims fees have been paid within the prescribed time limit. The present European search report has been drawn up for the first ten claims.

LACK OF UNITY OF INVENTION

The Search Division considers that the present European patent application does not comply with the requirements of unity of invention and relates to several inventions or groups of inventions, namely:

see sheet B

- ☒ All further search fees have been paid within the fixed time limit. The present European search report has been drawn up for all claims.
- ☐ As all searchable claims could be searched without effort justifying an additional fee, the Search Division did not invite payment of any additional fee.
- ☐ Only part of the further search fees have been paid within the fixed time limit. The present European search report has been drawn up for those parts of the European patent application which relate to the inventions in respect of which search fees have been paid, namely claims:
- ☐ None of the further search fees have been paid within the fixed time limit. The present European search report has been drawn up for those parts of the European patent application which relate to the invention first mentioned in the claims, namely claims:



European Patent
Office

LACK OF UNITY OF INVENTION
SHEET B

Application Number
EP 01 10 9534

The Search Division considers that the present European patent application does not comply with the requirements of unity of invention and relates to several inventions or groups of inventions, namely:

1. claims: 1-6

a recyclable digital photograph system comprising a camera
and a terminal.

2. claims: 7-14

a digital photograph system comprising a camera, a terminal
and an advertising server.

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 01 10 9534

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

10-02-2004

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
JP 11234542	A	27-08-1999	NONE	
EP 0560101	A	15-09-1993	US 5235366 A	10-08-1993
			DE 69307746 D1	13-03-1997
			DE 69307746 T2	17-07-1997
			EP 0560101 A1	15-09-1993
			JP 6019053 A	28-01-1994
US 5513254	A	30-04-1996	CA 2161474 A1	29-06-1996
EP 0981246	A	23-02-2000	EP 0981246 A1	23-02-2000
			US 2003007188 A1	09-01-2003
			US 2002054279 A1	09-05-2002
			WO 9948289 A1	23-09-1999
			JP 11327864 A	30-11-1999
			JP 11327744 A	30-11-1999
			JP 11331542 A	30-11-1999
			JP 11327716 A	30-11-1999
			JP 11327745 A	30-11-1999
			JP 11327746 A	30-11-1999
			JP 11320490 A	24-11-1999
			JP 11327865 A	30-11-1999
			JP 3125924 B2	22-01-2001
			JP 11321009 A	24-11-1999
			JP 2000163239 A	16-06-2000
			JP 3362680 B2	07-01-2003
			JP 11327850 A	30-11-1999
			JP 11321010 A	24-11-1999
			JP 3125925 B2	22-01-2001
			JP 11321011 A	24-11-1999
EP 0984406	A	08-03-2000	DE 19840313 A1	09-03-2000
			EP 0984406 A1	08-03-2000
EP 0860980	A	26-08-1998	US 2003025808 A1	06-02-2003
			DE 69818723 D1	13-11-2003
			EP 1337101 A2	20-08-2003
			EP 0860980 A2	26-08-1998
			JP 10304292 A	13-11-1998
			US 2001019359 A1	06-09-2001
			US 2001028474 A1	11-10-2001
			US 2001012066 A1	09-08-2001
EP 0830008	A	18-03-1998	US 6108104 A	22-08-2000
			AU 3755497 A	19-03-1998
			EP 0830008 A2	18-03-1998

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 01 10 9534

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

10-02-2004

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0830008	A	JP 10145542 A	29-05-1998
		US 6278531 B1	21-08-2001
JP 11192760	A	21-07-1999	NONE
JP 11069024	A	09-03-1999	BR 9803160 A
		CN 1209009 A	13-10-1999
		US 6622174 B1	24-02-1999
			16-09-2003

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

THIS PAGE BLANK (USPTO)